



www.AKCP.com

SMS Action Wizard

This tutorial provides you the information needed to setup an SMS action via the notification wizards.

To get to the starting point of this tutorial:

- Log in as administrator
- Click the “Notifications” tab


1. Adding a notification

a) First click on the “notification wizard”


The screenshot shows the AKCP securityProbe web interface in a Microsoft Internet Explorer browser window. The address bar shows the URL <http://10.1.1.205/wiznotifv.php>. The page title is "AKCP securityProbe". The navigation menu includes "Summary", "Map", "Picture Log", "Sensors", "Notification", "Settings", "Applications", and "Help". The "Notification" tab is selected and highlighted with a red circle and a red arrow pointing to it with the text "Click notification tab". Below the navigation menu, there is a "Notification Menu" section with a red circle around the "Begin Notification Wizard" link and a red arrow pointing to it with the text "Click here to begin setting up a notification". The main content area displays a table of "Action" items. The table has two columns: "Action Type" and "Action Name". The "Action Type" column lists "SNMP Trap", "Email", "Alarm Sound", "Speech", and "Picture Log". The "Action Name" column lists "SNMP Trap 1" through "SNMP Trap 6", "Email 1" through "Email 3", "Alarm Sound 1" and "Alarm Sound 2", "Speech 1" through "Speech 3", and "Picture Log 1". Below the table, there are buttons for "Create", "Duplicate", "Edit", "Remove", and "Test Action". The footer of the page contains the copyright notice "©1991 - 2007 AKCP All rights reserved." The browser's taskbar at the bottom shows several open windows, including "AKCP Customer Login...", "System Name - Micro...", "security_probe_manu...", "securityprobe_manua...", and "Inbox - Microsoft Out...". The system clock shows the time as 7:15 PM.

Action Type	Action Name
SNMP Trap	SNMP Trap 1
	SNMP Trap 2
	SNMP Trap 3
	SNMP Trap 4
	SNMP Trap 5
	SNMP Trap 6
Email	Email 1
	Email 2
	Email 3
Alarm Sound	Alarm Sound 1
	Alarm Sound 2
Speech	Speech 1
	Speech 2
	Speech 3
Picture Log	Picture Log 1

b) You will now have the notification wizard page displayed, like below.

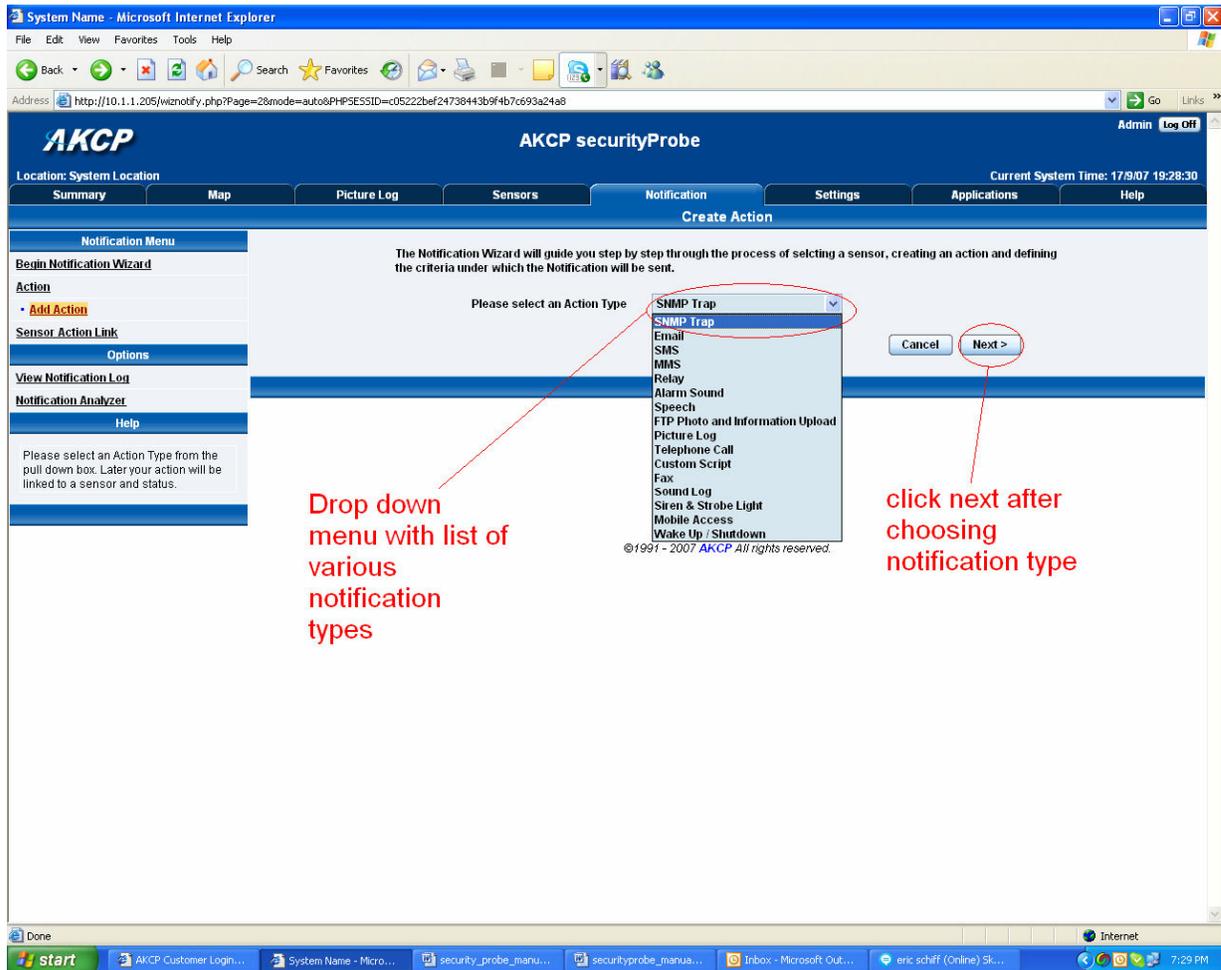

c) Select SMS action from the notification type options.

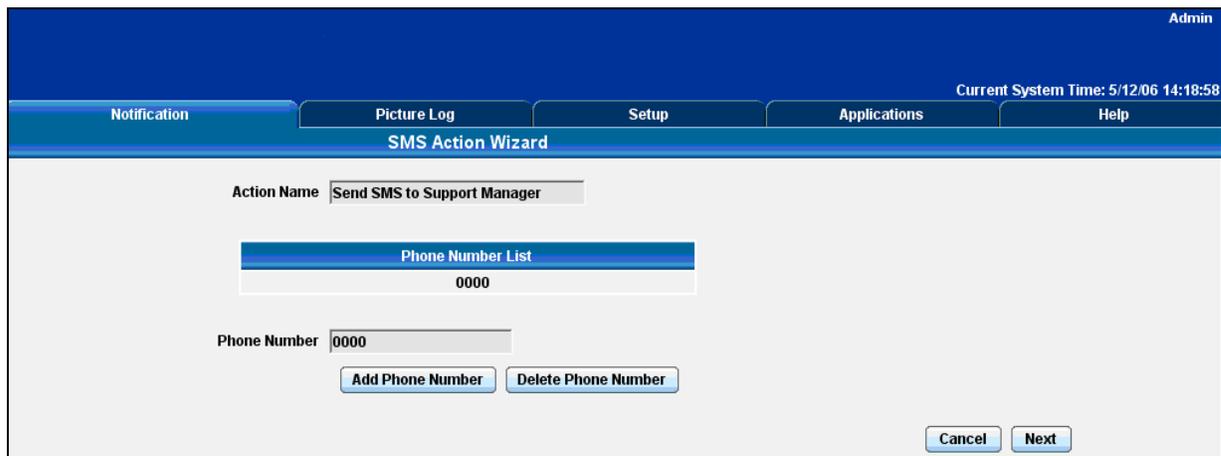

Please choose a name for your **SMS Action**. Descriptive Action names increase the simplicity of the system.

Enter your Destination phone number and Click **Add Phone Number**. You may include multiple phone numbers.

To delete a phone number from the list, select the number and press the **Delete Phone Number** button.

Click **Next** to continue




This is a preview of the message that will be sent to your recipient(s). The message sent will include the details relevant to your sensor.

Click **Customize** to edit the macro.

A macro is the piece of text that will return data from the securityProbe. For example `#[TIME]` will take the time from the securityProbe and append it to the email.

The **Macro Description** button gives you details of the data the macro displays. At any point during editing of the macro you can click the preview button to see the changes you have made to the message.


Click **Next** to continue

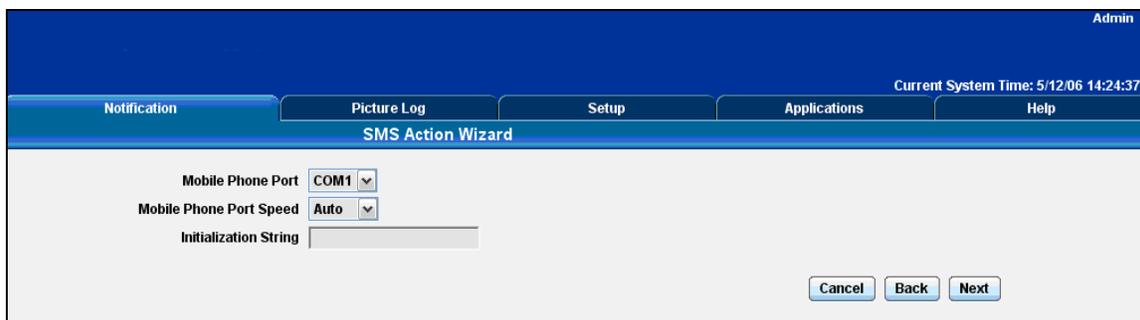

Select the connection method between your phone and computer.

If you do not know your Port Speed and Initialization String leave them as Auto and Blank respectively.

Click **Next** to continue

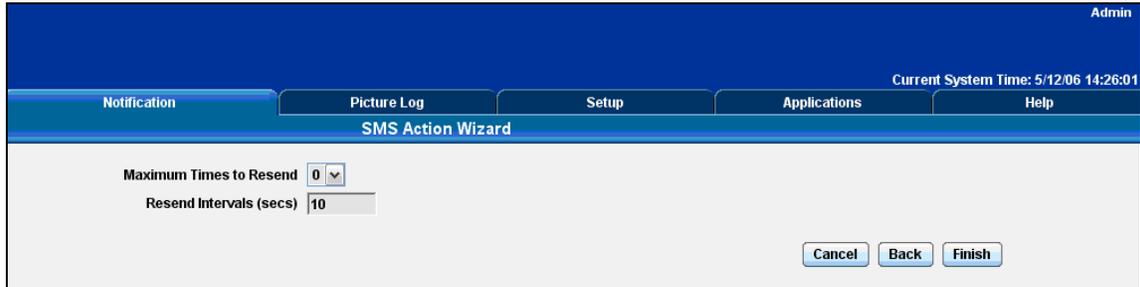

Define the Maximum number of Times to Resend and Resend Interval for the SMS message to be sent to your recipient(s).

Click **Finish** to Save your Action